

Mobile Control Systems

Master Module

Series ELMR223



developed in significantly shorter time-scales. The operating system represents the intelligence and functionality of the complete electronic system. It includes interface communications, parameterisation, configuration, I/O processing, recording/data logging and parameter-driven control algorithms (e.g. for controlling synchronous motion). The operating system is in use in numerous applications and is therefore robust, and proven to a high degree.

- outputs are protected against short-circuits and overloads; can be examined by diagnostics
- RS232 serial interface
- CAN-Bus (master) with CANopen protocol
- automatic, and program-controlled, data storage in flash EPROM

1 General

1.1 Product description

The ELMR223 master module is used as a controller in Bucher CAN bus systems.

The module can have up to 24 power outputs, some of which are configurable. The features of the operating system, which was specially developed by Bucher Hydraulic, enable customer applications to be

1.2 Advantages

- electrical data and equipment is optimised for use in the mobile industry
- programming to IEC 61131-3
- detection of under- and over-voltages
- diagnostic functions for software and hardware

1.3 Designed for

- the extreme mechanical stresses that result from impacts and shock loadings
- low and high ambient temperatures while in operation
- the direct effects of dirt, water and dampness during field service
- the large voltage fluctuations that are found in battery/alternator systems
- severe interference effects, whether radiated or conductor-linked, on the entire electrical system

2 Technical Data

	Controller as black box system for the implementation of a central or decentralised system design
Housing	closed, screened metal housing with flange fastening
Dimensions (h x w x d)	153 x 225 x 43 mm
Mounting	by means of 4 M5 x L screws to DIN 7500 or DIN 7984 mounting position horizontal or vertical to the mounting wall
Connection	55-pin connector, latched, protected against reverse polarity type AMP housing or Framatome AMP junior timer contacts, crimp connection 0,5 / 2,5 mm ²
Weight	1,2 kg
Operating/storage temperature	-40°C ... +85°C
Protection	IP 67 (protection rating for plug deo. on cable preparation)

Input/output channels (total)	max. 40 (the total number which is available depends on the wiring and configuration of the controller)				
Inputs	max. 40 (corr. to 0 outputs)				
		Number	Signal	Version	
	possible configurations	8	digital	for positive sensor signals with diagnostic capability	B _L
		or	analogue	0...10/32 V DC, 0/4...20 mA or ratiometric	A
		8	digital	for positive sensor signals	B _L
	or	4	digital	for positive sensor signals, with diagnostic capability	B _L
		frequency	max. 50 kHz		I _L
or	4	digital	for positive/negative sensor signals, with diagnostic capability	B _{L/H}	
	frequency	max. 1 kHz		I _{L/H}	
	8	digital	for positive/negative sensor signals, with diagnostic capability	B _{L/H}	
	8	digital	for positive sensor signals, with diagnostic capability	B _L	
Outputs	max. 24 (corr. to 16 inputs)				
		Number	Signal	Version	
	possible configurations	8	digital	positive switching (High Side), with diagnostic capability	B _H
		or or	PWM current-controlled	PWM frequency 20...250 Hz 0,1...4 A	PWM PWM _I
		8	digital	positive switching (High Side), with diagnostic capability	B _H
	or	4	digital	positive switching (High Side), with diagnostic capability	B _H
PWM		PWM frequency 20...250 kHz		PWM	
	4	digital	positive/negative switching (High/Low Side), with diagnostic capability can also be used as H bridge	B _{H/L} H-bridge	
Operating voltage U _B	10 ... 32 V DC				
Overvoltage	36 V for t ≤ 10 s				
undervoltage detection	for U _B ≤ 9,5 V				
Auto save	for U _B ≤ 9,0 V				
Current consumption	≤ 160 mA (without external load at 24 V DC)				
CAN interface 1	CAN interface 2.0 B, ISO 11898				
Baud rate	20 Kbits/s ... 1 Mbit/s (default setting 125 Kbits/s)				
Communication profile	CANopen, CiA DS 301 version 4, CiA DS 401 version 1.4				
Node-ID (CANopen)	hex 20 (= dec. 32)				
CAN interface 2	CAN interface 2.0 A/B, ISO 11898				
Baud rate	20 Kbits/s ... 1 Mbit/s (default setting 125 Kbits/s)				
Communication profile	SAE J 1939 or free protocol				
Serial interface	RS 232 C				
Baud rate	9,6 kBit/s, 19,2 kBit/s, 28,8 kBit/s				
Topology	point-to-point (max. 2 participants); master-slave connection				
Protocol	predefined ifm protocol (INTELHEX)				
Processor	CMOS microcontroller 16 Bit C167CS; cycle frequency 20/40 MHz				

Device monitoring	undervoltage monitoring watchdog function check sum test for program and system excess temperature monitoring
Process monitoring concept	two relays according to EN 954 monitor two groups of 12 outputs each
Program memory	1 MByte Flash, can be used by the user
Data memory	128 Kbytes SRAM, 32 Kbytes Flash, 3 Kbytes FRAM
Data memory (protected in case of power failure)	256 Byte (auto-save memory)
Status indication	three couler LED (red/green/blue)

Operating states (Status-LED)	LED-colour	Status	Description
if both faults occur simultaneously, the LED appears orange.	-	off	no operating voltage
	orange	1 x on	initialisation or reset checks
	green	5 Hz	no operating system loaded
	green	0,5 Hz 2,0 Hz on	Run, CANopen: PREOPERATIONAL Run, CANopen: OPERATIONAL Stop, CANopen: PREPARED
	red	0,5 Hz 2,0 Hz on	Run with error (CANopen: PREOPERATIONAL) Run with error (CANopen: OPERATIONAL) fatal error or stop with error

	Test standards and regulations
Climatic tes	Damp heat to EN 60068-2-30, test Db (\leq 95% rel. humidity, non-condensing) Salt mist test to EN 60068-2-52, test Kb, severity level 3 Degree of protection to EN 60529
Mechanical resistance	vibration to IEC 68-2-6, Test Fc shock to IEC 68-2-27, Test Ea bump to EN 60068-2-29, Test Eb
Immunity to conducted interference	to ISO 7637-2, pulses 2, 3a, 3b, severity level 4, function state A
	to ISO 7637-2, pulses 5, severity level 1, function state A
	tp ISO 7637-2, pulses 1, severity level 4, function state C
Immunity to interfering fields	directive 95/54/EG (at 100 V/m) and DIN EN 61326 (e1 type approval)
Interference emission	directive 95/54/EG and DIN EN 61326 (e1 type approval)

	characteristics of the inputs
Digital/analogue inputs (B _L , A) %IW00...07 %IX0.00...07 can be configured as	<p>Voltage inputs</p> <p>input voltage 0...10/32 V</p> <p>resolution 10 bit_s</p> <p>input resistance 50/30 kΩ</p> <p>input frequency 50 Hz</p> <hr/> <p>Current inputs</p> <p>input current 0/4...20 mA</p> <p>resolution 10 bit</p> <p>input resistance 400 kΩ</p> <p>input frequency 50 Hz</p> <hr/> <p>Digital inputs for positive sensor signals, with diagnostic capability *)</p> <p>switch-on level 0,7 U_B</p> <p>switch-off level 0,4 U_B</p> <p>input resistance 30 kΩ</p> <p>input frequency 50 Hz</p>
Digital inputs (B _L) %IX0.08...11 %IX0.16...19 can be configured as	<p>Digital inputs for positive sensor signals</p> <p>switch-on level 0,4...0,7 U_B</p> <p>switch-off level 0,29 U_B</p> <p>input resistance 3,21 kΩ</p> <p>input frequency 50 Hz</p>
Digital inputs (B _L , I _L) %IX0.12...15 can be configured as	<p>Digital inputs for positive sensor signals, with diagnostic capability *)</p> <p>switch-on level 0,7 U_B</p> <p>switch-off level 0,4 U_B</p> <p>input resistance 2,86 kΩ</p> <p>input frequency 50 Hz</p> <hr/> <p>Frequency inputs for positive sensor signals with diagnostic capability, evaluation with integrated comparator</p> <p>switch-on level 0,43...0,73 U_B</p> <p>switch-off level 0,29 U_B</p> <p>input resistance 2,86 kΩ</p> <p>input frequency max. 50 Hz</p>
Digital inputs (B _{L/H} , I _{L/H}) %IX0.20...23 can be configured as	<p>Digital inputs for positive/negative sensor signals, with diagnostic capability *)</p> <p>switch-on level 0,7 U_B</p> <p>switch-off level 0,4 U_B</p> <p>input resistance 3,21 kΩ</p> <p>input frequency 50 Hz</p> <hr/> <p>Frequency inputs for positive/negative sensor signals with diagnostic capability, evaluation with integrated comparator</p> <p>switch-on level 0,43...0,73 U_B</p> <p>switch-off level 0,29 U_B</p> <p>input resistance 3,21 kΩ</p> <p>input frequency max. 1 kHz</p>
Digital inputs (B _{L/H}) %IX0.24...31 can be configured as	<p>Digital inputs for positive/negative sensor signals, with diagnostic capability *)</p> <p>switch-on level 0,7 U_B</p> <p>switch-off level 0,4 U_B</p> <p>input resistance 3,21 kΩ</p> <p>input frequency 50 Hz</p>
Digital inputs (B _L) %IX0.32...39 can be configured as	<p>Digital inputs for positive sensor signals, with diagnostic capability *)</p> <p>switch-on level 0,4...0,7 U_B</p> <p>switch-off level 0,2...0,24 U_B</p> <p>input resistance 3,21 kΩ</p> <p>input frequency 50 Hz</p>
Test input	<p>During the test mode (e.g. programming) the "TEST" connection must be connected to U_B. For the "RUN" mode the input must not be connected.</p> <p>input resistance 3,21 kΩ</p>

*) NAMUR inputs

Digital inputs with diagnostic capability can be used as NAMUR inputs when used with an external resistor connection.
supply voltage 5...25 V; e.g. ifm NAMUR sensoren NT5001...NN5002

	characteristics of the outputs
Outputs (B _H , PWM, PWM _I) %QX0.00...07 can be configured as	Semiconductor outputs, with diagnostic capability positive switching (high side), short-circuit an overload protected switching voltage 10...32 V DC switching current max. 4 A
%QX0.00...05 can be configured as	PWM outputs; with diagnostic capability PWM frequency max. 250 Hz PWM pulse ratio 1...99 % resolution depending on the PWM frequency load current max. 4 A integrated pull-down resistor (4,7 kΩ) to trigger Danfoss valves
	Current-controlled outputs; with diagnostic capability switching current 0,1...4 A total current max. 16 A setting resolution 1 mA control resolution 5 mA accuracy ± 2% FS
Outputs (B _H) %QX0.08...15 can be configured as	Semiconductor outputs, with diagnostic capability positive switching (high side), short-circuit an overload protected switching voltage 10...32 V DC switching current max. 2 A output frequency max. 100 Hz (depending on the load)
Outputs (B _H , PWM) %QX0.16, 19, 20, 23 can be configured as	Semiconductor outputs, with diagnostic capability positive switching (high side), short-circuit an overload protected switching voltage 10...32 V DC switching current max. 4 A output frequency max. 100 Hz (depending on the load)
	PWM outputs PWM frequency max. 250 Hz PWM pulse ratio 1...99 % resolution depending on the PWM frequency load current max. 4 A
Outputs (B _{L/H}) %QX0.17, 18, 21, 22 can be configured as	Semiconductor outputs, with diagnostic capability positive/negative switching (high/low side), short-circuit an overload protected switching voltage 10...32 V DC switching current max. 4 A output frequency max. 100 Hz (depending on the load)
Internal relay outputs for electrically isolated deactivation of the outputs	Normally open contacts in series to 2 groups of 12 semiconductor outputs. Sustained forcing by means of hardware and additional controlling by means of user program.
	The relays must always be switched without load!
	total current max. 12 A je Gruppe switching current 0,1...15 A overload current 20 A number of operating cycles ≤ 10 ⁶ (without load) switching-time constant ≤ 3 ms

Explanation

A = analogue
B_H = binary High Side
B_L = binary Low Side
I_H = pulse High Side
I_L = pulse Low Side


PWM = pulse width modulation
PWM_I = current-controlled output
%IWx = IEC-address for analogue input
%IX0.xx = IEC-address for binary input
%QX0.xx = IEC-address for binary output

3 Ordering code

ELMR223 - 00*** without software
Order-no: 100026514

ELMR223 - 01*** with specific software
Order-no: 100.....

4 Dimensions

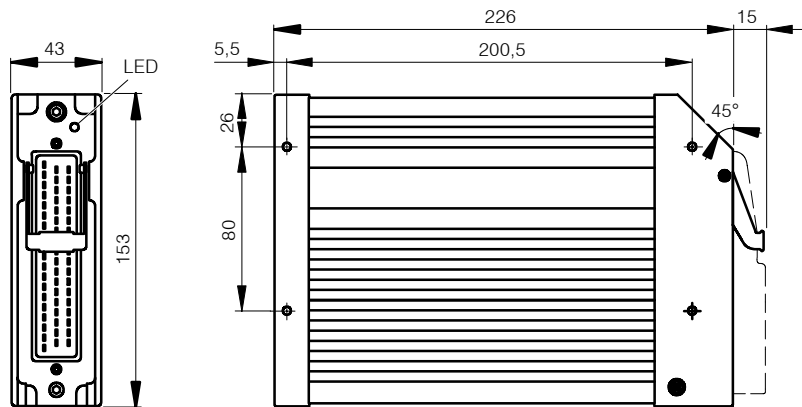

5 Wiring

Pin	Potential	Description	note
23	VBB _S (10...32 V DC)	supply sensors and module	
05	VBB _O (10...32 V DC)	supply outputs	relay switched (1)
34	VBB _R (10...32 V DC)	supply via relay	relay switched (2)
01	GND _S	ground sensors and module	
15	GND _O	ground outputs	
12	GND _A	ground analogue outputs	

CAN, RS232, ERROR, TEST

Pin	Potential	Description	note
14	CAN1 _H	CAN-Interface 1 (High)	
32	CAN1 _L	CAN-Interface 1 (Low)	
26	CAN2 _H	CAN-Interface 2 (High)	SAE J 1939
25	CAN2 _L	CAN-Interface 2 (Low)	SAE J 1939
33	GND	ground	
06	RxD	RS 232-Interface (programming)	Pin 03, PC D-Sub (9 pin)
07	TxD	RS 232-Interface (programming)	Pin 02, PC D-Sub (9 pin)
13	ERROR	Error outout B _H	
24	TEST	test input	

inputs/outputs

pin	inputs	configuration	outputs	configuration	diagnostic capability input / output	relay switched
08	%IX0.00 / %IW00	B _L A	-	-	• / -	
27	%IX0.01 / %IW01	B _L A	-	-	• / -	
09	%IX0.02 / %IW02	B _L A	-	-	• / -	
28	%IX0.03 / %IW03	B _L A	-	-	• / -	
10	%IX0.04 / %IW04	B _L A	-	-	• / -	
29	%IX0.05 / %IW05	B _L A	-	-	• / -	
11	%IX0.06 / %IW06	B _L A	-	-	• / -	
30	%IX0.07 / %IW07	B _L A	-	-	• / -	
44	%IX0.08	B _L	%QX0.00	B _H PWM PWM _I	- / •	VBB _O (1)
45	%IX0.09	B _L	%QX0.01	B _H PWM PWM _I	- / •	VBB _O (1)
46	%IX0.10	B _L	%QX0.02	B _H PWM PWM _I	- / •	VBB _O (1)
47	%IX0.11	B _L	%QX0.03	B _H PWM PWM _I	- / •	VBB _O (1)
20	%IX0.12	B _L I _L	-	-	• / -	
02	%IX0.13	B _L I _L	-	-	• / -	
21	%IX0.14	B _L I _L	-	-	• / -	
38	%IX0.15	B _L I _L	-	-	• / -	
36	%IX0.16	B _L	%QX0.04	B _H PWM PWM _I	- / •	VBB _R (2)
54	%IX0.17	B _L	%QX0.05	B _H PWM PWM _I	- / •	VBB _R (2)
17	%IX0.18	B _L	%QX0.06	B _H	- / •	VBB _R (2)
53	%IX0.19	B _L	%QX0.07	B _H	- / •	VBB _R (2)
19	%IX0.20	B _{L/H} I _{L/H}	-	-	• / -	
55	%IX0.21	B _{L/H} I _{L/H}	-	-	• / -	
18	%IX0.22	B _{L/H} I _{L/H}	-	-	• / -	
37	%IX0.23	B _{L/H} I _{L/H}	-	-	• / -	
39	%IX0.24	B _{L/H}	%QX0.08	B _H	• / •	VBB _O (1)
03	%IX0.25	B _{L/H}	%QX0.09	B _H	• / •	VBB _O (1)
40	%IX0.26	B _{L/H}	%QX0.10	B _H	• / •	VBB _O (1)
22	%IX0.27	B _{L/H}	%QX0.11	B _H	• / •	VBB _O (1)
41	%IX0.28	B _{L/H}	%QX0.12	B _H	• / •	VBB _O (1)
42	%IX0.29	B _{L/H}	%QX0.13	B _H	• / •	VBB _O (1)
43	%IX0.30	B _{L/H}	%QX0.14	B _H	• / •	VBB _O (1)
04	%IX0.31	B _{L/H}	%QX0.15	B _H	• / •	VBB _O (1)
48	%IX0.32	B _L	%QX0.16	B _H PWM	• / •	VBB _R (2)
49	%IX0.33	B _L	%QX0.17	B _{H/L} H-Bridge	• / •	VBB _R (2)
31	%IX0.34	B _L	%QX0.18	B _{H/L} H-Bridge	• / •	VBB _R (2)
50	%IX0.35	B _L	%QX0.19	B _H PWM	• / •	VBB _R (2)
51	%IX0.36	B _L	%QX0.20	B _H PWM	• / •	VBB _R (2)
52	%IX0.37	B _L	%QX0.21	B _{H/L} H-Bridge	• / •	VBB _R (2)
16	%IX0.38	B _L	%QX0.22	B _{H/L} H-Bridge	• / •	VBB _R (2)
35	%IX0.39	B _L	%QX0.23	B _H PWM	• / •	VBB _R (2)

Note the double pin connection of inputs/outputs.

BUCHER HYDRAULICS

www.bucherhydraulics.com

Germany

Phone +49 7742 85 20
Fax +49 7742 71 16
info.de@bucherhydraulics.com

France

Phone +33 389 64 22 44
Fax +33 389 65 28 78
info.fr@bucherhydraulics.com

Netherlands

Phone +31 79 34 26 24 4
Fax +31 79 34 26 28 8
info.nl@bucherhydraulics.com

UK

Phone +44 24 76 35 35 61
Fax +44 24 76 35 35 72
info.uk@bucherhydraulics.com

USA

Phone +1 262 605 82 80
Fax +1 262 605 82 78
info.wi@bucherhydraulics.com

Switzerland

Phone +41 33 67 26 11 1
Fax +41 33 67 26 10 3
info.ch@bucherhydraulics.com

Italy

Phone +39 0522 92 84 11
Fax +39 0522 51 32 11
info.it@bucherhydraulics.com

Austria

Phone +43 6216 44 97
Fax +43 6216 44 97 4
info.at@bucherhydraulics.com

China

Phone +86 512 6 322 12 99
Fax +86 512 6 322 10 33
info.sh@bucherhydraulics.com

Product Center (Elevator)

Phone +41 41 757 03 33
Fax +41 41 755 16 49
info.nh@bucherhydraulics.com

We reserve the right of modification without prior notice.